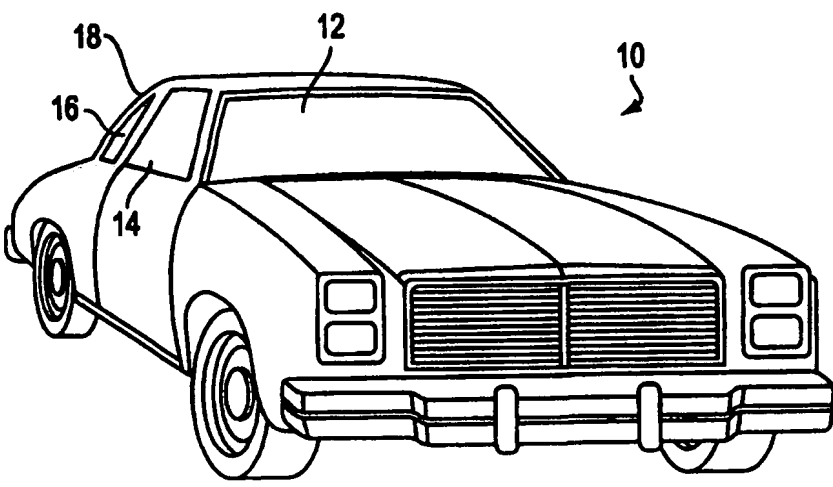


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b> <b>B32B 5/16, 27/30, 27/36</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 99/61237</b> <b>(43) International Publication Date:</b> 2 December 1999 (02.12.99)
<b>(21) International Application Number:</b> PCT/US99/11110 <b>(22) International Filing Date:</b> 20 May 1999 (20.05.99) <b>(30) Priority Data:</b> 60/086,598 22 May 1998 (22.05.98) US <b>(71) Applicant (for all designated States except US):</b> MAGNA INTERNATIONAL OF AMERICA, INC. [US/US]; 600 Wilshire Drive, Troy, MI 48084 (US). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> WILSON, Phillip, S. [US/US]; 5480 Huron Hills Drive, Commerce Township, MI 48382 (US). <b>(74) Agents:</b> LIPPITT, Raymond, F. et al.; Pillsbury Madison & Sutro, LLP, 1100 New York Avenue, N.W., Washington, DC 20005 (US).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> WINDOW FOR MOTOR VEHICLE    <b>(57) Abstract</b> <p>A window (12, 14, 16, 18) for a motor vehicle (10) comprising transparent polycarbonate plastic material and reinforcement particles dispersed within the polycarbonate plastic material. The reinforcement particles comprise less than 10 % of a total volume of the window. At least 50 % of the reinforcement particles have a thickness of less than 10 nanometers. The reinforcement particles are selected and configured such that the window has a transmittance of visible light which is at least 95 % of the transmittance of visible light that would exist through the window in the absence of the reinforcement particles.</p>		

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## WINDOW FOR MOTOR VEHICLE

### Field of the Invention

This invention relates to a window for a motor vehicle. In particular, this invention relates to an improved polycarbonate window for a motor vehicle.

### 5 Background of the Invention

Motor vehicle windows, by and large, have heretofore been made from glass. It would be desirable to manufacture motor vehicle windows from a polycarbonate material, which is much lighter than glass. While use of polycarbonate plastic material has been acceptable for certain applications, such as  
10 for commercial bus windows, its lack of durability has precluded polycarbonate material from widespread use in passenger cars. In particular, conventional polycarbonate plastic material is subject to scuffing and marring during manufacture and at point of use. In addition, the desired stiffness could only be achieved with undesirably thick polycarbonate windows. Any attempt to reinforce  
15 the polycarbonate material has resulted in commercially unacceptable hazing or reduction in the transparency of the window. While Federal Motor Vehicle Safety Standard (FMVSS) 205 requires simply that vehicle windows to have at least 70% transmittance of visible light, the type of hazing that would result from conventional reinforcements would be aesthetically unappealing.

### 20 Summary of the Invention

The disadvantages of the prior art may be overcome by providing a window for a motor vehicle comprising transparent polycarbonate plastic material and reinforcement particles dispersed within the polycarbonate material. The reinforcement particles comprise less than 10% of a total volume of the window.  
25 At least 50% of the reinforcement particles have a thickness of less than 10

nanometers. The reinforcement particles are selected and configured such that the window has a transmittance of visible light which is at least 95% of the transmittance of visible light that would exist through the window in the absence of the reinforcement particles.

5        It is a further object of the present invention to provide a window comprising a transparent thermoplastic material selected from the group consisting of polycarbonate and acrylic, and reinforcement particles dispersed within the thermoplastic material. The reinforcement particles comprise less than 10% of a total volume of the window. At least 50% of the reinforcement particles have a  
10   thickness of less than 10 nanometers. The reinforcement particles are selected and configured such that the window has a transmittance of visible light which is at least 95% of the transmittance of visible that would exist through the window in the absence of the reinforcement particles.

      Because the nanoparticles are smaller than the wavelength of visible light,  
15   they are individually invisible to the naked eye. As a result, the nanoparticles can be impregnated into the polycarbonate or acrylic at loadings of preferably less than 10% by volume of the total volume of the window, and with particle sizes of preferably less than 10 nanometers in average thickness, without any appreciable decrease in transparency. In addition, the stiffness and scratch resistance of the  
20   window is greatly improved. Specifically, the stiffness can be improved by a factor of 1.5-4.0 X in comparison with unreinforced parts. In addition, scuff or mar resistance can also be improved by a factor of between about 1.4-4.0 X. In addition, impact resistance can be improved or maintained while reducing the window's thickness.

**Brief Description of the Drawing**

FIG. 1 is a perspective view of a window manufactured in accordance with the present invention, shown installed in a motor vehicle.

**Detailed Description of the Present Invention**

5           The automobile window manufactured in accordance with the present invention comprises a composite material of a polycarbonate having disbursed therein reinforcement fillers in the form of very small mineral reinforcement particles. The reinforcement filler particles, also referred to as "nanoparticles" due to the magnitude of their dimensions, each comprise one or more generally flat  
10   platelets. Generally, the platelets have a thickness of between about 0.7 to about 1.2 nanometers. The average platelet thickness is approximately 1 nanometer thick. The preferred aspect ratio (which is the largest dimension divided by the thickness) for each particle is about 50 to about 300.

          The platelet particles or nanoparticles are derivable from larger, layered  
15   mineral particles. Any layered mineral capable of being intercalated may be employed in the present invention. Layered silicate minerals are preferred. The layered silicate minerals that may be employed include natural and artificial minerals. Non-limiting examples of more preferred minerals include  
20   montmorillonite, vermiculite, hectorite, saponite, hydrotalcites, kanemite, sodium octosilicate, magadiite, and kenyaite. Mixed Mg and Al hydroxides may also be used. Among the most preferred minerals is montmorillonite.

          To exfoliate the larger mineral particles into their constituent layers, different methods may be employed. For example, swellable layered minerals, such as montmorillonite and saponite are known to intercalate water to expand the  
25   inter layer distance of the layered mineral, thereby facilitating exfoliation and

dispersion of the layers uniformly in water. Dispersion of layers in water is aided by mixing with high shear. The mineral particles may also be exfoliated by a shearing process in which the mineral particles are impregnated with water, then frozen, and then dried. The freeze dried particles are then mixed into molten  
5 polymeric material and subjected to a high sheer mixing operation so as to peel individual platelets from multi-platelet particles and thereby reduce the particle sizes to the desired range.

The composites of the present invention are prepared by combining the platelet minerals with the desired polycarbonate plastic in the desired ratios as  
10 discussed below. The components can be blended by general techniques known to those in the art. For example, the components can be blended and then melted in mixers or extruders.

Additional specific preferred methods, for the purposes of the present invention, for forming a polymer composite having dispersed therein exfoliated  
15 layered particles are disclosed in U.S. Patent Nos. 5,717,000, 5,747,560, 5,698,624, and WO 93/11190. Additional background is included in the following references: U.S. Patent Nos. 4,739,007 and 5,652,284.

The exfoliation of layered mineral particles into constituent layers need not be complete in order to achieve the objects of the present invention. The present  
20 invention contemplates that at least 50 % of the particles should have a thickness of less than 10 nanometers to achieve desired reinforcement and only a slight decrease in visible light transmittance through the polycarbonate host. As the percentage of particles having a thickness of less than 10 nanometers increases, so does the visible light transmittance. In addition, a decrease in the average particle  
25 thickness will also increase visible light transmittance. In any event, the

reinforcement particles are selected, sized, and configured such that the final composite window will have a transmittance of visible light which is at least 95% of the transmittance of visible that would exist through the window in the absence of the reinforcement particles. Otherwise stated, the decrease in visible light transmittance is less than 5% in comparison with an identical polycarbonate window prepared without such reinforcing particles.

In an even more preferred window, at least 70% of the particles have a thickness of less than 5 nanometers to achieve even better reinforcement and an even smaller decrease in visible light transmittance. It is also preferable for at least 99% of the particles to have a thickness of less than about 30 nanometers. Particles having more than 30 layers act as stress concentrators and are preferably avoided to the extent possible. It is most preferable to have as many particles as possible to be as small as possible, ideally including only single platelets.

As noted above, the preferred aspect ratio (which is the largest dimension divided by the thickness) for each particle is about 50 to about 300. At least 80% of the particles should be within this range. If too many particles have an aspect ratio above 300, the material becomes too viscous for forming parts in an effective and efficient manner. If too many particles have an aspect ratio of smaller than 50, the particle reinforcements will not provide the desired reinforcement characteristics. More preferably, the aspect ratio for each particle is between 100-200. Most preferably at least 90% of the particles have an aspect ratio within the 100-200 range.

Generally, in accordance with the present invention, the composite polycarbonate window should contain an amount of reinforcement particles, which constitutes less than 10% by volume of the total volume of the window. If

greater than 10% by volume of reinforcement filler is used, the viscosity of the composition becomes too high and thus difficult to mold. More preferably, 3-7% by volume is used, as this would provide most of the desired benefits, and would achieve even better light transmittance (e.g., better than 98% of the transmittance of visible light that would exist through the window in the absence of reinforcement particles). In any case, the balance of the window comprises polycarbonate plastic and suitable additives used in conventional polycarbonate windows.

Another advantage obtained in accordance with the present invention relates to the fact that use of the reinforcement particles in an amount in which the reinforcement particles comprise less than 10% of a total volume of the window, and wherein at least 50% of the reinforcement particles have a thickness of less than 10 nanometers, will result in a decrease in the coefficient of linear thermal expansion by a factor of 1.5-4.0X in comparison with conventional polycarbonate windows. As a result, the window becomes more dimensionally stable under different temperature conditions. This, in turn, provides the window with better sealing characteristics, as the windows position relative to, for example, a rubber based sealing member becomes more predictable.

The use of the nanoparticle reinforcing material also greatly improves the surface toughness of the polycarbonate material so as to improved the durability and scuff/mar resistance.

A front window manufactured in accordance with the present invention is illustrated in FIG. 1 and designated by reference numeral 12. The window 12 is shown installed in a motor vehicle, designated by reference numeral 10. It should



be appreciated that side windows 14 and 16 and a rear window 18 may also be made in accordance with the materials of the present invention.

It should be noted that similar benefits may be achieved in other plastic glazing materials, such as acrylic resins used for architectural applications.

- 5 Architectural glazings would enjoy the same benefits of reduced thickness required, reduced weight to be supported, and improved durability.

It should be appreciated that the foregoing description is illustrative in nature and that the present invention includes modifications, changes, and equivalents thereof, without departure from the scope of the invention.

**WHAT IS CLAIMED IS:**

1. A window for a motor vehicle comprising transparent polycarbonate plastic material and reinforcement particles dispersed within the polycarbonate plastic material, said  
5 reinforcement particles comprise less than about 10% of a total volume of the window, at least 50% of the reinforcement particles having a thickness of less than about 10 nanometers, said reinforcement particles being selected and configured such that the window has a transmittance of visible light which is at least 95% of  
10 the transmittance of visible light that would exist through the window in the absence of the reinforcement particles.

2. A window according to claim 1, wherein at least 70% of the particles have a thickness of less than about 5 nanometers.

3. A window according to claim 2, wherein at least 99% of the particles have a thickness of less than about 30 nanometers.

4. A window according to claim 3, wherein at least 80% of the  
20 particles have an aspect ratio of between about 50 to about 300.

5. A window according to claim 4, wherein at least 90% of the particles have an aspect ratio of between about 100 to about 200.

6. A window according to claim 3, wherein said particles are of a material selected from a group consisting of montmorillonite, vermiculite, hectorite, saponite, hydrotalcites, kanemite, sodium octosilicate, magadiite, and kenyaite.

5

7. A window comprising a transparent thermoplastic material selected from the group consisting of polycarbonate and acrylic, and reinforcement particles dispersed within the thermoplastic material, the reinforcement particles comprise less than 10% of a total volume of the window, at least 50% of the reinforcement particles have a thickness of less than 10 nanometers, the reinforcement particles selected and configured such that the window has a transmittance of visible light which is at least 95% of the transmittance of visible light that would exist through the window in the absence of the reinforcement particles.

10

15

8. A window according to claim 7, wherein at least 70% of the particles have a thickness of less than about 5 nanometers.

20

9. A window according to claim 8, wherein at least 99% of the particles have a thickness of less than about 30 nanometers.
10. A window according to claim 9, wherein at least 80% of the particles have an aspect ratio of between about 50 to about 300.

11. A window according to claim 10, wherein at least 90% of the particles have an aspect ratio of between about 100 to about 200.
12. A window according to claim 9, wherein said particles are of a material selected from a group consisting of montmorillonite, vermiculite, hectorite, saponite, hydrotalcites, kanemite, sodium octosilicate, magadiite, and kenyaite.

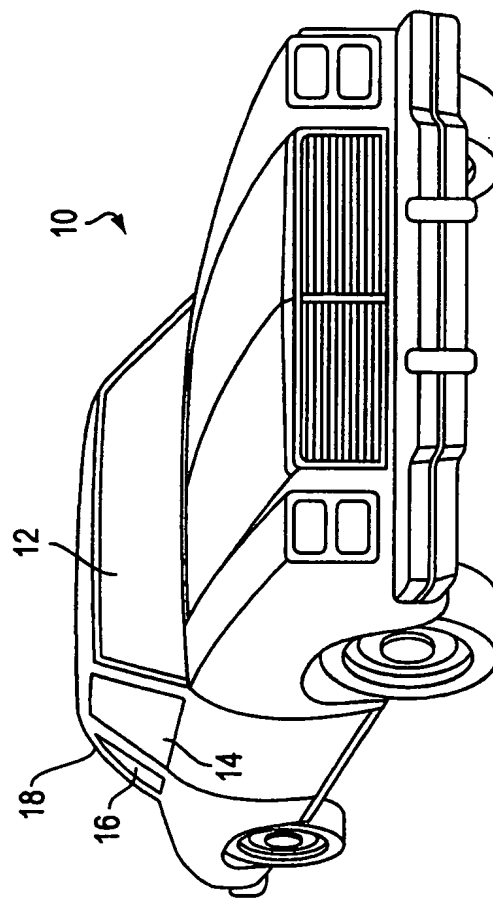


FIG. 1

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US99/11110

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :B32B 5/16, 27/30, 27/36

US CL :428/323, 330, 412, 522

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 428/323, 330, 412, 522

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Derwent Abstracts

search terms: polycarbonate, filler, particle

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,733,659 A (IWAKIRI et al.) 31 March 1998, col 3, lines 1-7 and col 5, lines 12-25.	1-5, 7-11
Y	US 5,569,700 A (IWAKIRI et al.) 29 October 1996, col. 1, lines 7-17 and col.4, lines 14-22.	1-5, 7-11
Y	Derwent Abstract, 1997-259217, WO 97/15935 A1, 1 May 1997, abstract	1-5, 7-11
Y	Derwent Abstract, 1996-225189, JP 08085749 A, 2 April 1996, abstract	1-5, 7-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

23 JULY 1999

Date of mailing of the international search report

02 SEP 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

RAMSEY ZACHARIA

Telephone No. (703) 305-0503

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK** (USPTO,